



Technical Bulletin #21 Adding Registry Settings


Click 'Start->Run '

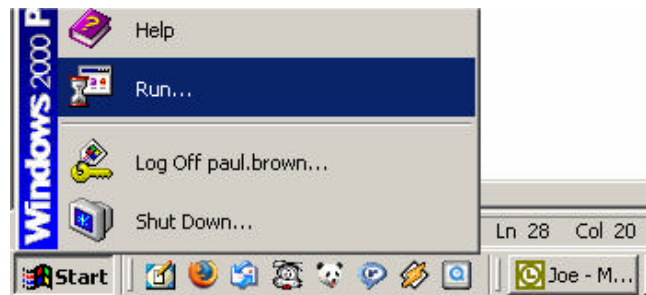

Type 'regedit' and click Ok.

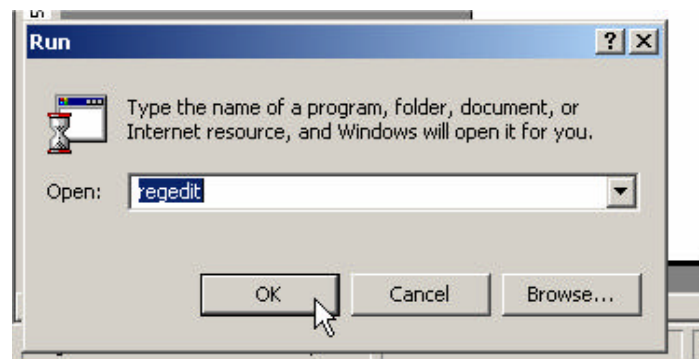


In the right-hand pane of the registry editor, click on the '+' sign at the side of the entry labelled 'HKEY_LOCAL_MACHINE', this will expand the folder.

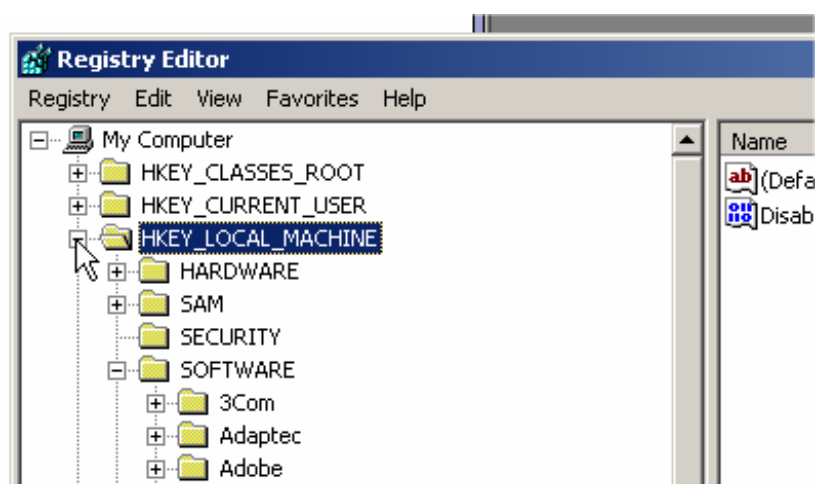


Next expand the folder labelled 'Software', followed by 'Vale-Tech Applications', Followed by 'InkManager'.




Left click on the sub-folder that is required, i.e. Settings, MachineSettings, etc. and the list of entries for that sub-folder will appear in the right-hand pane.

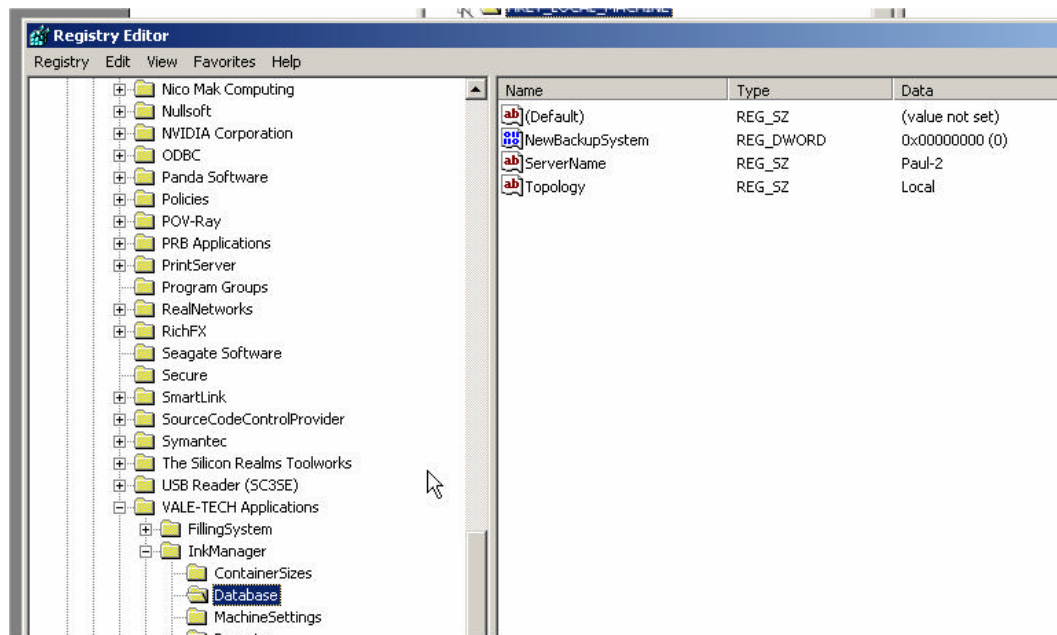

To add a value, you will firstly need to know what type of value you are adding, this is usually a DWORD and sometimes a STRING. Right-click in a blank area of the right-hand side panel and click on new, next click the type of value that you need to add.

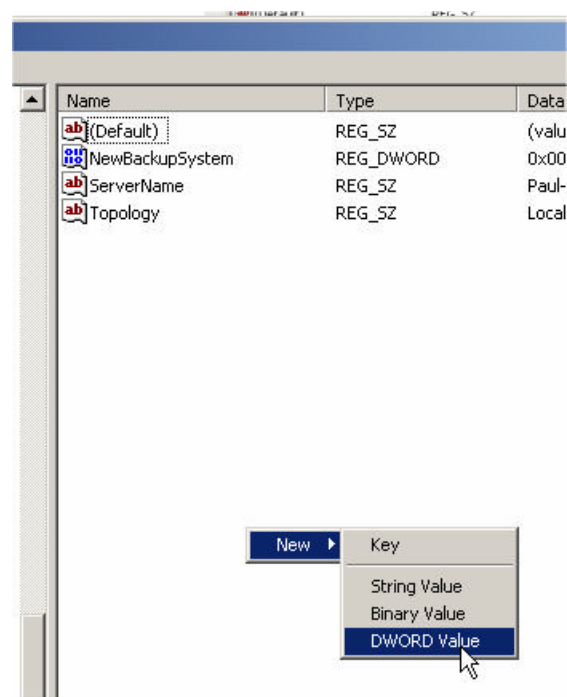


Next type in the name of the value you wish to add. Please note that the values are case sensitive and need to be entered exactly as written. Press enter when finished.

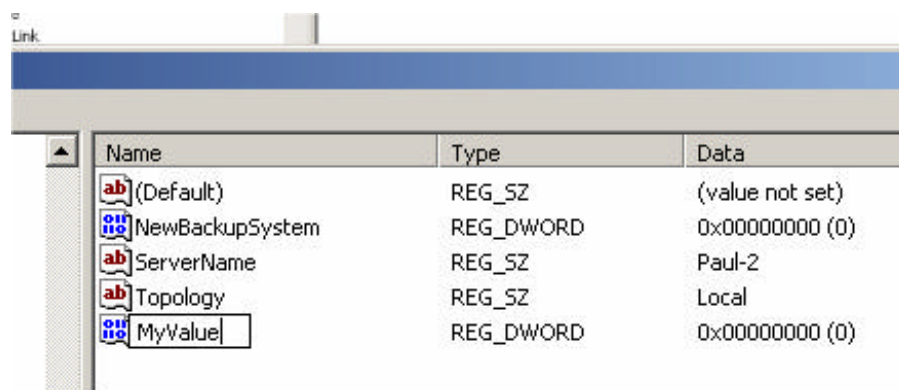

The image shows a window titled 'Link' with a table of registry values. The table has three columns: Name, Type, and Data. The values listed are: (Default) with Type REG_SZ and Data (value not set); NewBackupSystem with Type REG_DWORD and Data 0x00000000 (0); ServerName with Type REG_SZ and Data Paul-2; Topology with Type REG_SZ and Data Local; and MyValue with Type REG_DWORD and Data 0x00000000 (0). The 'MyValue' entry is selected.

Name	Type	Data
(Default)	REG_SZ	(value not set)
NewBackupSystem	REG_DWORD	0x00000000 (0)
ServerName	REG_SZ	Paul-2
Topology	REG_SZ	Local
MyValue	REG_DWORD	0x00000000 (0)

Next double click the on the name that you have just entered, this will display the modification box.

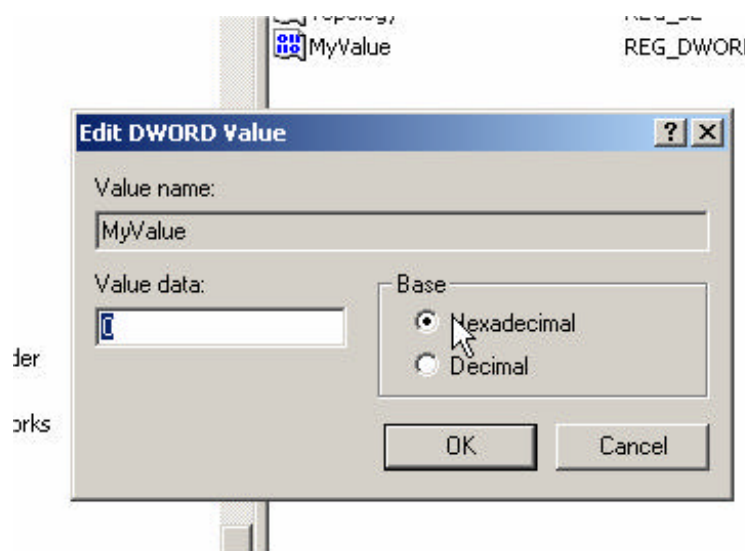

The image shows the 'Edit DWORD Value' dialog box. It has a title bar with a question mark and a close button. Inside, there is a 'Value name:' field containing 'MyValue'. Below it is a 'Value data:' field with a cursor. To the right of the 'Value data:' field is a 'Base' section with two radio buttons: 'Hexadecimal' (which is selected) and 'Decimal'. At the bottom are 'OK' and 'Cancel' buttons.

Value name: MyValue

Value data: []

Base

☒ Hexadecimal

☐ Decimal

OK Cancel

Type in the new required value and click OK. The entry is now complete and the registry editor can be closed down.